



**Single-circuit metering,
measurement &
analysis**


DIRIS A60

Multifunction meters - PMD

energy monitoring and event analysis - dimensions 96 x 96 mm



Principle diagram

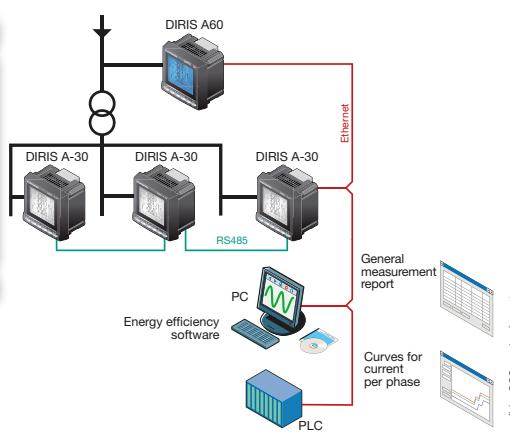

Function

DIRIS A60 is a panel mounted multifunction meter which incorporates all functions of the DIRIS A-30 with the addition of enhanced data logging functions, recording curves for quality events. All this information can be analysed remotely using the Analysis software which is available at no charge and can be downloaded from the SOCOMEC website www.socomec.com.

Advantages

Easy to use

Thanks to its large backlit LCD display and its multiple viewing screens with direct key access, the DIRIS A60 provides clear readings and is easy to use.

It directly displays a number of multi-measurement and metering values : +/- kWh, +/- kvarh, kVAh, I, U, V, F, P, Q, S, PF, etc.

Detects wiring errors

An integrated test function can be utilised to detect incorrect wiring and to automatically correct CT installation errors.

Compliant with IEC 61557-12

IEC 61557-12 is a high-level standard for all PMDs (Performance Monitoring Devices) that are designed to measure and monitor electrical parameters in distribution networks.

Compliance with IEC 61557-12 ensures a high level of equipment performance, in terms of metrology, and the mechanical and environmental aspects (EMC, temperature, etc.).

Functions

In addition to the functions of the DIRIS A-30, the DIRIS A60 also:

- shows the current and voltage unbalance
- shows the tangent φ
- stores the load curves (60 days with an interval of 10 minutes) for the active, reactive and apparent power: $\Sigma P+/-$, $\Sigma Q+/-$, ΣS
- detects and stores the last 40 events concerning:
 - overvoltage
 - voltage dips
 - cut-offs
 - overcurrent.

For each stored event, the DIRIS A60 records the relevant RMS 10 ms interval curves for the voltages V1, V2, V3, U12, U23, U31 and the currents I1, I2, I3, In, giving a total of 400 curves.

Other functions:

Multi-measurement

Currents

- instantaneous: I1, I2, I3, In, Isystem,
 - average/maximum average: I1, I2, I3, In,
 - unbalance: I unb.
- Voltages & frequency
 - instantaneous: V1, V2, V3, U12, U23, U31, F, Vsystem, Usystem
 - average/maximum average: V1, V2, V3, U12, U23, U31, F
 - unbalance: U unb.
- Power
 - instantaneous: 3P, ΣP , 3Q, ΣQ , 3S, ΣS
 - maximum average: ΣP , ΣQ , ΣS
 - predictive: ΣP , ΣQ , ΣS .
- Power factor - PF, ΣPF
 - Instantaneous total tangent φ
 - Instantaneous, average and max. average unbalance

Events⁽¹⁾

- internal,
- external via 3 PT100 sensors

Metering

- Active energy: +/- kWh
- Reactive energy: +/- kvarh
- Apparent power: kVAh
- Hours: \odot

Harmonic analysis (level 63)

- Total harmonic distortion
 - Currents: thd I1, thd I2, thd I3, thd In
 - Phase-to-neutral voltage: thd V1, thd V2, thd V3
 - Phase-to-phase voltage: thd U12, thd U23, thd U31
- Individual
 - Currents: H1I1, H1I2, H1I3, HIn
 - Phase-to-neutral voltage: HV1, HV2, HV3,
 - Phase to phase voltage: HU12, HU23, HU31

Events⁽¹⁾

- Alarms on all electrical values

Communications⁽¹⁾

- 0/4- 20 mA analogue output
- RS485 MODBUS RTU
- Ethernet (MODBUS TCP or MODBUS RTU over TCP and Webserver)
- Ethernet (MODBUS TCP or MODBUS RTU over TCP and Webserver) with RS485 MODBUS RTU gateway

Inputs / Outputs⁽¹⁾

- Pulse metering
- Remote control/command
- Alarm report
- Pulse report

⁽¹⁾ Available as an option
(see the following pages).

The solution for

- Industry

- Infrastructure

- Data centre



Strong points

- Easy to use
- Detects wiring errors
- Compliant with IEC 61557-12
- Management software
- Conformity to standard EN 50160



Conformity to standards

- IEC 61557-12
- IEC 62053-22
class 0.5S
- IEC 62053-23
class 2
- EN 50160

Front panel



1. Backlit LCD display.
2. Direct access key for currents, temperatures and test function.
3. Direct access key for voltages and frequency.
4. Direct access key for active, reactive, and apparent powers and power factor.
5. Direct access key for maximum and average current, voltage and power values.
6. Direct access key for harmonics values.
7. Direct access key for energies, hour meter and programming menu.


Plug-in modules

DIRIS® A60*



* With integrated memory module.

diris.834-a

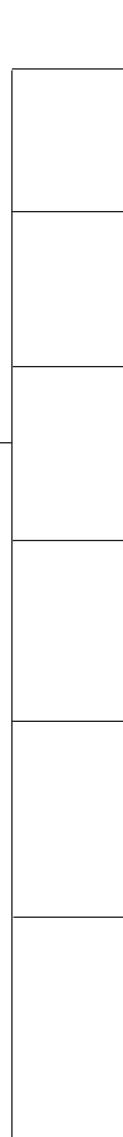

diris.445



diris.447



diris.777



diris.776



diris.448



diris.449



diris.747

Pulse outputs

- 2 configurable pulse outputs (type, weight and duration) on \pm kWh, \pm kvarh and kWh.

Communication MODBUS®

- RS485 link with MODBUS® protocol (speed up to 38400 bauds).

Ethernet communication

- Ethernet connection with MODBUS TCP or MODBUS RTU over TCP protocol.
- Embedded Webserver function⁽¹⁾.

Ethernet communication with RS485 MODBUS gateway

- Ethernet connection with MODBUS TCP or MODBUS RTU over TCP protocol.
- Connection of 1 to 247 RS485 MODBUS slaves.
- Embedded Webserver function⁽¹⁾.

Analogue outputs

- A maximum of 2 modules may be connected, providing up to 4 analogue outputs.
- Per module 2 outputs assignable to:
3I, In, 3V, 3U, F, \pm Σ P, \pm Σ Q, Σ S, Σ PFL/C, Isys, Vsyst, Usyst, Ppred, Qpred, Spred, T°C internal, T°C 1, T°C 2, T°C 3 and to 30 VDC power supply.

2 inputs - 2 outputs

- A maximum of 3 modules may be connected, providing up to 6 inputs and 6 outputs.
- Per module 2 outputs assignable to:
- monitoring: 3I, In, 3V, 3U, F, \pm Σ P, \pm Σ Q, Σ S, Σ PFL/C, THD 3I, THD In, THD 3V, THD 3U, Ppred, Qpred, Spred, T°C internal, T°C 1, T°C 2, T°C 3 and hour meter,
- remote control,
- timed remote control,
- 2 inputs for pulse metering.

Temperature⁽²⁾

Temperature indication:

- Internal
- External sensor PT 100 (T°C 1)
- External sensor PT 100 (T°C 2)
- External sensor PT 100 (T°C 3)

(1) See "Management software tools" pages.

(2) See "External sensor PT 100".

DIRIS A60

Multifunction meters - PMD

energy monitoring and event analysis - dimensions 96 x 96 mm

Accessories

Current transformers



trafo_024

Split-core current
transformers



trafo_077

IP65 protection



DIRIS_720

Panel mounting kit
for a 144 x 96 mm cut-out




DIRIS_718

Terminals

DIRIS A60

DIRIS_856_a_1_x_cat

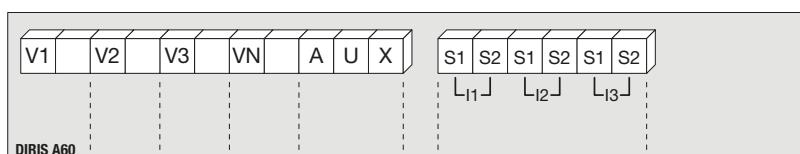


S1 - S2: current inputs

AUX: auxiliary power supplies U_s
V1 - V2 - V3 - VN: voltage inputs

RS485 MODBUS module

DIRIS_857_a_1_x_cat

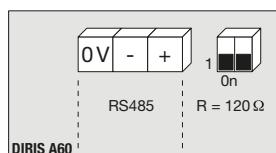


RS485 link.

R = 120 Ω: selectable internal resistance
for RS485 end of line termination.


Ethernet module

DIRIS_862_a_1_x_cat



Ethernet module + RS485 MODBUS gateway

DIRIS_859_b_1_gb_cat

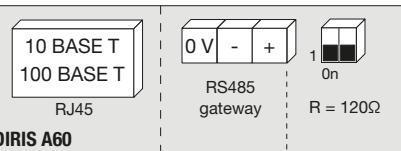


RS485 gateway resistor.

R = 120 Ω: selectable internal resistance
for RS485 end of line termination.

Pulse output module

DIRIS_860_a_1_x_cat

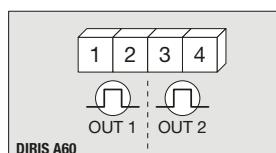


1 - 2: pulse output n°1.

3 - 4: pulse output n°2.


Temperature module

DIRIS_861_a_1_gb_cat

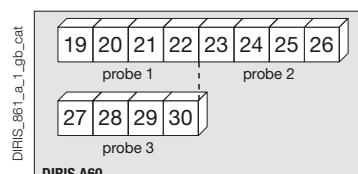

2 inputs / 2 outputs module

DIRIS_858_b_1_gb_cat



9 - 10: relay output n°1.


11 - 12: relay output n°2.

13 - 14: opto input n°1.

15 - 16: opto input n°2.

Analogue output module

DIRIS_863_a_1_x_cat

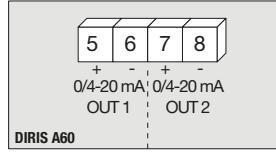

5 - 6: analogue output n°1.

7 - 8: analogue output n°2.


Electrical characteristics

Current measurement on insulated inputs (TRMS)		2 inputs / 2 outputs module: Outputs (alarms / control)	
Via CT primary	9 999 A	Number of relays	2 ⁽¹⁾
Via CT secondary	1 or 5	Type	250 VAC - 5 A - 1150 VA
Measurement range	0 ... 11 kA	2 inputs / 2 outputs module: Phototransistor inputs (pulse metering)	
Input consumption	≤ 0.1 VA	Number	2 ⁽¹⁾
Measurement updating period	1 s	Power supply	10 ... 30 VDC
Accuracy	0.2 %	Minimum signal width	10 ms
Permanent overload	6 A	Minimum duration between 2 pulses	18 ms
Intermittent overload	10 I _n for 1 s	Type	phototransistors
Voltage measurements (TRMS)		Pulse output module	
Direct measurement between phases	50 ... 700 VAC	Number of relays	2
Direct measurement between phase and neutral	28 ... 404 VAC	Type	100 VDC - 0.5 A - 10 VA
VT primary	500 000 VAC	Max. number of operations	≤ 10 ⁸
VT secondary	60, 100, 110, 173, 190 VAC	Analogue output module	
Frequency	50 / 60 Hz	Number of outputs	2 ⁽²⁾
Input consumption	≤ 0.1 VA	Type	insulated
Measurement updating period	1 s	Range	0 / 4 ... 20 mA
Accuracy	0.2 %	Load resistance	600 Ω
Permanent overload	800 VAC	Maximum current	30 mA
Current-voltage product		MODBUS communication module	
Limitation for 1A CT	10 000 000	Link	RS485
Limitation for 5A CT	10 000 000	Type	2 ... 3 half duplex wires
Power measurement		Protocol	MODBUS RTU
Measurement updating period	1 s	MODBUS® speed	4800 ... 38400 bauds
Accuracy	0.5 %	Ethernet communication module	
Power factor measurement		Connection	RJ45
Measurement updating period	1 s	Speed	10 base T / 100 base T
Accuracy	0.5 %	Protocol	MODBUS TCP or MODBUS RTU over TCP
Frequency measurement		Temperature inputs	
Measurement range	45 ... 65 Hz	Type	PT100
Measurement updating period	1 s	Connection	2, 3 or 4 wires
Accuracy	0.1 %	Dynamic	- 20 ... 150 °C
Energy accuracy		Accuracy	± 1 digit
Active (according to IEC 62053-22)	Class 0.5 S	Maximum length	300 cm
Reactive (according to IEC 62053-23)	Class 2	Operating conditions	
Auxiliary power supply		Operating temperature	- 10 ... + 55 °C
Alternating voltage	110 ... 400 VAC	Storage temperature	- 20 ... + 85 °C
AC tolerance	± 10 %	Relative humidity	95 %
Direct voltage	120 ... 350 VDC		
DC tolerance	± 20 %		
Frequency	50 / 60 Hz		
Consumption	≤ 10 VA		

(1) Max. 3 modules / DIRIS.

(2) Max. 2 modules / DIRIS.

Case

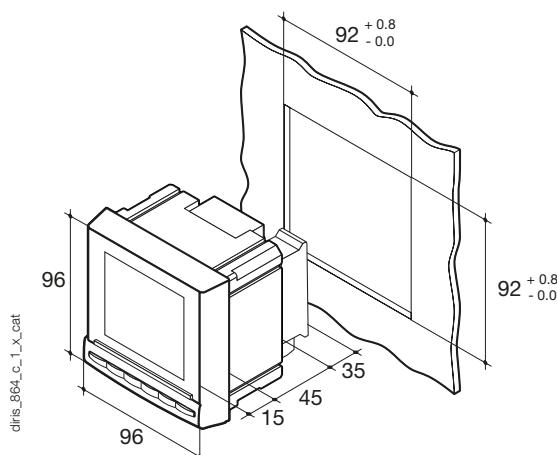

Type	panel mounting
Dimensions W x H x D	96 x 96 x 80 mm
Case degree of protection	IP30
Front degree of protection	IP52
Display type	backlit LCD display
Terminal blocks type	fixed or plug-in
Voltage and other terminals connection cross-section	0.2 ... 2.5 mm ²
Current connection cross-section	0.5 ... 6 mm ²
Weight	450 g

DIRIS A60

Multifunction meters - PMD


energy monitoring and event analysis - dimensions 96 x 96 mm

Connection

Low voltage balanced network for DIRIS A60

Recommendation: When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a SOCOMECH PTI, which can be found in the SOCOMECH catalogue: please consult us.


3/4 wires with 1 CT

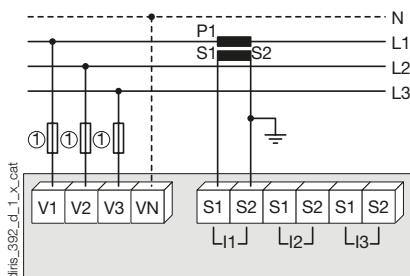

Use of 1 CT reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.


1. Fuses 0.5 A gG / 0.5 A class CC.

Single-phase

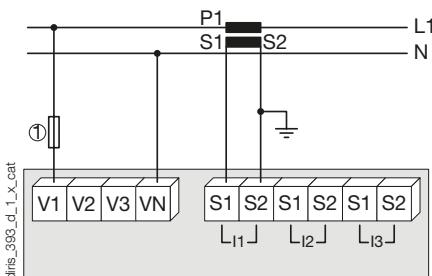

1. Fuses 0.5 A gG / 0.5 A class CC.


Two-phase

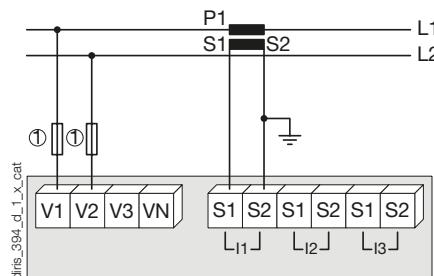

1. Fuses 0.5 A gG / 0.5 A class CC.


Low voltage unbalanced network for DIRIS A60

3/4 wires with 3 CTs

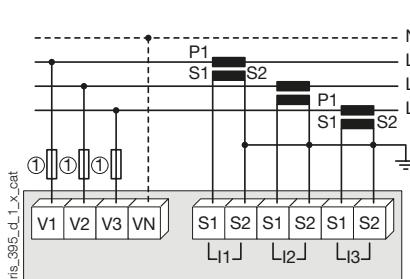

1. Fuses 0.5 A gG / 0.5 A class CC.


3 wires with 2 CTs

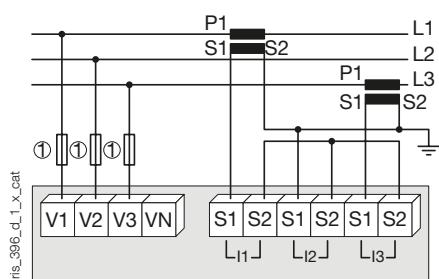

Use of 2 CTs reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.

1. Fuses 0.5 A gG / 0.5 A class CC.

3 wires with 2 CTs

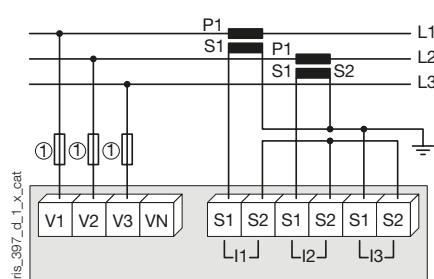


Use of 2 CTs reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.

1. Fuses 0.5 A gG / 0.5 A class CC.

Additional information


Communication via RS485 link

diris_399_b_1_x_cat

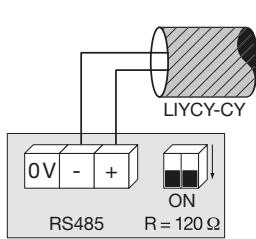


Connection of voltage transformer for HV networks

diris_398_c_1_x_cat

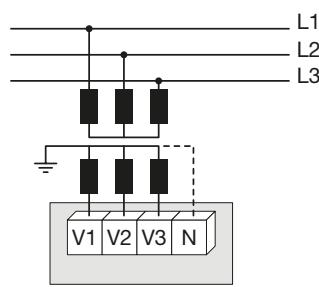

AC & DC auxiliary power supply

diris_400_l_1_x_cat

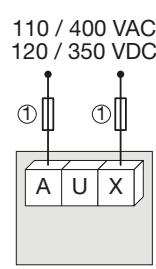

1. Fuses 0.5 A gG / 0.5 A class CC.

References

	DIRIS A60
	Reference
Basic device	
Auxiliary power supply U_s	4825 0207
110 ... 400 VAC / 120 ... 350 VDC	
Options	
Plug-in-modules ⁽¹⁾	Reference
Pulse outputs	4825 0090
RS485 MODBUS® communication	4825 0092
Analogue outputs	4825 0093
2 inputs / 2 outputs	4825 0094
Ethernet communication (embedded Ethernet Webserver) ⁽²⁾	4825 0203
Ethernet communication + RS485 MODBUS gateway (embedded Ethernet Webserver) ⁽²⁾	4825 0204
Temperature inputs	4825 0206

(1) Easy integration of additional functions (maximum 3 slots per device).

(2) Dimension of the plug-in module: 2 slots.

Options	To be ordered in multiples of	Reference
Description of accessories		
IP65 protection	1	4825 0089
Panel mounting kit for a 144 x 96 mm cut-out	1	4825 0088
Fuse disconnect switches for the protection of voltage inputs (type RM) 3 poles	4	5601 0018
Fuse disconnect switches for the protection of the auxiliary supply (type RM) 1 pole + neutral	6	5601 0017
Fuse type gG 10 x 38 0.5 A	10	6012 0000
Ferrite to be associated with communication modules	1	4899 0011
Current transformer range	1	See "TE sensors" pages
Temperature sensor PT100 - M6 screw type	1	4825 0208
Temperature sensor PT100 - M6 eyelet type	1	4825 0209
Management software for DIRIS		See "Management software tools" pages

Expert Services

- Study, definition, advice, implementation, maintenance and training... Our experts "Expert Services" offer complete support for the success of your project.

